

User Manual - TempMHC 740

Temporary manhole cover - Aegis Products Limited

Fig.1

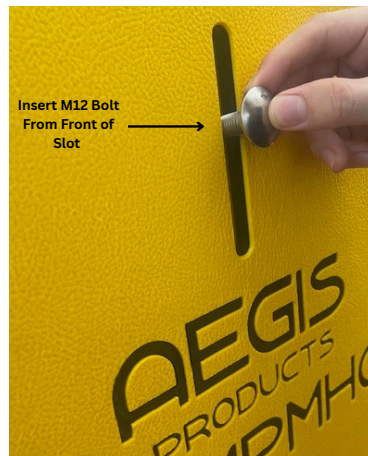


Fig.2



Fig.3



Fig.4

Product overview:

The **TempMHC 740** is a temporary manhole cover designed for quick deployment and reliable safety. It provides secure coverage of open manholes on worksites, preventing accidents and ensuring compliance with safety standards.

- **Adjustment Range:** 470 – 680 mm
- **Maximum Load:** 150 kg
- **Use:** Temporary, non-vehicular

Safety Instructions

- **Temporary Use Only** – Not designed for permanent or vehicular loads.
- **Load Limit** – Do not exceed **150 kg**.
- **Inspection** – Check stoppers are fully engaged before use.
- **Environment** – For pedestrian areas, footpaths, and worksites.

Maintenance

- Wipe clean after use.
- Inspect threaded stoppers for wear or damage.
- Store flat in a dry area away from direct sunlight.

Key benefits

- 🚧 Improves safety with high-visibility cover
- ⚙️ Adjustable to fit 470–680 mm openings
- 🚀 Lightweight (6.0 kg) and portable
- 🌍 Durable HDPE, weather and impact resistant
- ✅ Helps meet health & safety compliance
- 📦 Space-saving and easy to transport
- 🔒 Professional, reusable, non-corrosive solution

⚠️ WARNING – Improper use may cause injury, damage, or accidents.

- Always follow local road safety and traffic control regulations when installing.
- Ensure product is positioned securely
- Do not use if the cover shows visible cracks, or excessive wear
- Not designed for permanent installation - take off when the job is finished and replace it with the original manhole cover removed at the start.

Contact Us

Albany - Auckland 0630, New Zealand

Mob: (027) 425 1664

Email: ben@aegisproducts.co.nz

Web: www.aegisproducts.co.nz